

E-Z ROLL CARRIER

SPECIFICATIONS

Main spindle13' 4" x 4" O.D.
Second spindle4" long.
Dolly width39"
Dolly length67"
Dolly height32"
Handle rolls to	134". (Add optional 4' attachment for rolls up to 182".)
Total weight232 lbs.
Capacity1000 lbs.




Each spindle is supported by two smooth-rolling bearings for easier material application.

THE QUICKEST, SAFEST WAY TO TRANSPORT AND LAY DOWN HEAVY EPDM ROLLS



Transporting and laying down large, bulky rolls of rubber roofing material has never been easier than with Garlock's E-Z Roll Carrier. Our sturdy slide tube spindle and versatile dollies do most of the work for you, so you can finish your roll jobs quickly and safely.


Using the E-Z Roll Carrier is simple. Just follow these three steps:

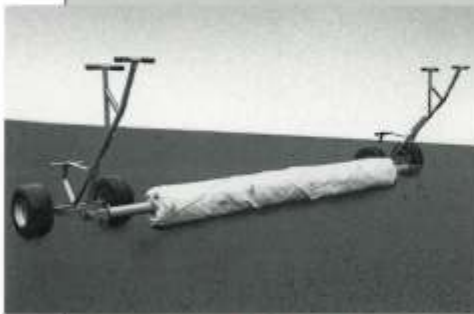

Step 1
Fit the slide tube into the roll and attach the two dollies to the ends.



Step 2
Pull dollies down and back to lift the roll.

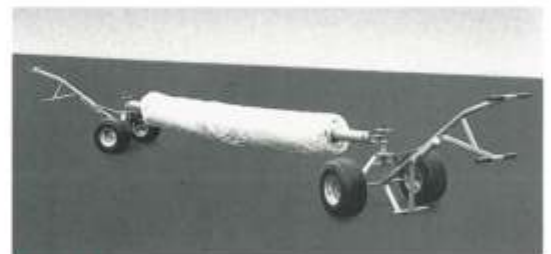

Step 3
Use the E-Z Roll Carrier to transport the roll to the installation site and lay down the material. The E-Z Roll Carrier can handle rolls up to 134". Add the optional 4' extension to fit rolls up to 182". The versatile dollies swivel, so you can always find the best angle for lifting and moving even the heaviest rolls. Plus, they rest backwards on a support brace to hold rolls off the ground unattended.

Where Better Engineering Comes Out On Top

DISTRIBUTED BY:

FRS
CANADA
A Division of THE FRIB GROUP INC.

465 Lucas Ave, Winnipeg,
MB. R3C 2E6
Ph (204) 774-5079 Fax (204) 775-6142
email: info@frsmb.com

GARLOCK
EQUIPMENT COMPANY

2601 Niagara Lane
Minneapolis, MN 55447
612 /553 /1935
800 /328 /9522