


## **RCS-20**

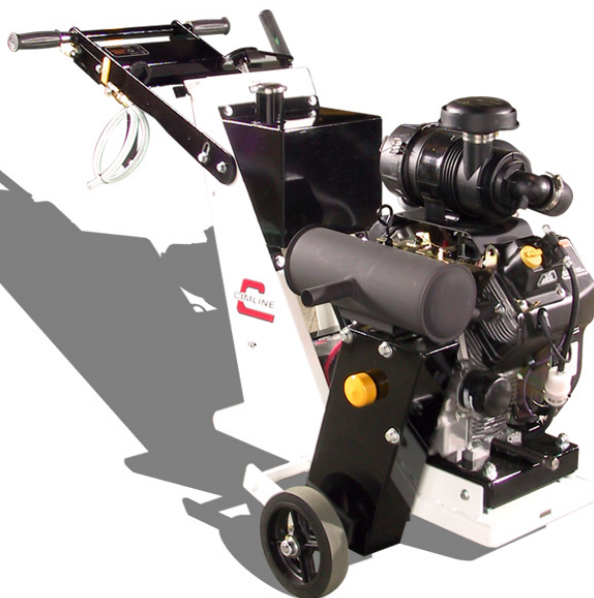

The **RCS-20** is the most versatile of **CIMLINE'S** crack saws. Switch from upcut to downcut and from random crack work to straight cutting in one simple operation. Our optional 12" guard provides the ability to convert to wire brush or diamond blade. Complete crack preparation and cleaning with one versatile machine.

- Gas powered
- 20 horsepower four-cycle air cooled engine
- Upcut and downcut, random and straight cutting controls
- Optional 12" guard for wire brush or diamond blade
- Optional straight line cutting kit

## **PCS-25**



**CIMLINE'S PCS-25** delivers unmatched production and superior maneuverability in random crack sawing. Only the smooth cutting power of a diamond blade gives operators the control and power they expect from a crack saw. Cut through asphalt and concrete with optimum control.

- Gas powered
- 25 horsepower engine
- Diamond blade
- Adjustable handle height
- Asphalt and concrete in wet or dry conditions
- Electric depth control

# RCS-20

## SPECIFICATIONS:

**FRAME:** Rigid, jig-welded tubular and plate 3/16" plate steel frame.

**HANDLES:** Height adjustable for different operator comfort and preference. Folds down for compact storage and transport. Cushioned grips.

**ENGINE:** 20 HP, twin cylinder overhead valve electric-start Kohler gasoline engine with hydraulic valve lifters, integrated oil cooler, spin-on oil filter, electronic ignition and spark advance..

**AIR FILTRATION:** Dual dry-element air cleaners and removes 98% of contaminants.

**WHEELS:** 8" diameter wheels with 4" rear semi-steel caster.

**ARBOR SHAFT AND BLADE GUARD:** 1" diameter arbor shaft with pillow block bearings allows for 8" to 12" diamond blade or 12" brush. Includes blade guard.

**DRIVE BELT:** Four groove 3V section sheaves on the engine and arbor shaft with four single banded groove belts. Bolt-on vented belt guard.

**DEPTH ACTUATOR AND GAUGE:** Lockable manual depth control precise to 1/4 inch increments.

**FUEL SYSTEM:** Six gallon fuel tank.

**TOOLS AND LABELS:** Arbor wrench included. Safety and instruction labels conform to current safety regulations.

**PAINT:** Primed and painted manufacturers std. white/ black.

**OPTIONS:** Digital hour meter, water kit, straight line sawing kit and night sawing light system.

# PCS-25

## SPECIFICATIONS:

**FRAME:** Rigid, jig-welded tubular and plate steel frame includes lifting bale.

**HANDLES:** Height adjustable for different operator comfort and preference. Folds down for compact storage and transport. Cushioned grips.

**ENGINE:** 25 HP, twin cylinder overhead valve electric-start Kohler gasoline engine with hydraulic valve lifters, integrated oil cooler, spin-on oil filter, electronic ignition and spark advance.

**AIR FILTRATION:** Dual dry-element air cleaners.

**AXLE AND WHEELS:** 1-1/4" pivoting axle mounted to frame with two split-housing bearings. 4:80 x 8 (16" diameter) wheels highway rated with automotive-type tapered roller bearings mounted on machined spindle.

**ARBOR SHAFT AND BLADE GUARD:** 1" diameter arbor shaft with Timken roller bearings allows for up to a 9" diamond blade with 12" blade guard.

**DRIVE BELT:** Four groove 3V section sheaves on the engine and drum shaft with four single banded groove belts. Bolt-on vented belt guard.

**DEPTH ACTUATOR AND GAUGE:** Single toggle switch activated, fused ball screw actuator raises and lowers the machine. Cutting depth indicator for easy operator reference.

**FUEL SYSTEM:** Six gallon fuel tank (with fuel gauge).

**TOOLS AND LABELS:** Arbor wrench included. Safety and instruction labels conform to current safety regulations.

**PAINT:** Primed and painted manufacturers std. white/ black.

**OPTIONS:** Digital hour meter, water kit and night sawing light system.



PAVEMENT MAINTENANCE GROUP