


SWING HOIST

SPECIFICATIONS

Swing beam reach:	.49 in.
Swing beam height:	.97 in.
A-frame weight:	.76 lbs.
Boom weight:	.42 lbs.
Swing beam weight:	.20 lbs.
Total weight:	138 lbs.
Capacity:	400 lbs.

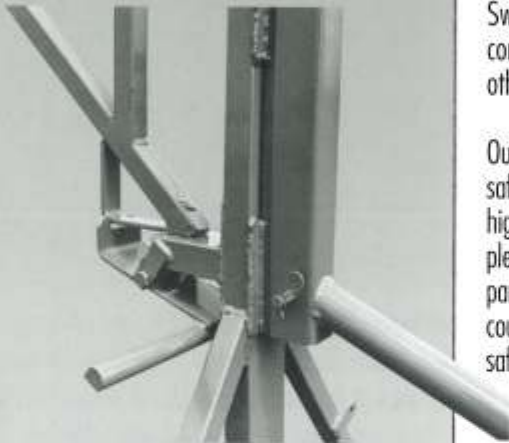

The swing arm locks into position during lifting, then swings to carry loads directly onto the rooftop.



Quick Pins are permanently attached with chains to make setup a snap and prevent lost hardware. No tools required for setup.

NO OTHER MANUAL HOIST GIVES YOU MORE CONTROL OVER YOUR LOADS.

Lift loads of up to 400 lbs. directly onto nearly any rooftop worksite with Garlock's Swing Hoist. The sturdy swing beam locks into position for lifting, then swings left or right to place the load directly onto the roof. The Swing Hoist gives you more control over your loads than any other rigid hoist on the market.

Outriggers stabilize loads for safe and sturdy lifting. Plus, the high beam clearance provides plenty of height to clear most parapet walls. Use the optional counterweight system to ensure safe and steady performance.



Outriggers stabilize the hoist when loads are swung to the side.

Where Better Engineering Comes Out On Top



465 Lucas Ave, Winnipeg,
MB. R3C 2E6
Ph (204) 774-5079 Fax (204) 775-6142
email: info@frsmb.com

GARLOCK
EQUIPMENT COMPANY

2601 Niagara Lane
Plymouth, MN 55447
763 /553 /1935
800 /328 /9522

HAND POWER HOIST

SPECIFICATIONS

Boom length:	166 in.
Boom weight:	46 lbs.
Upright length:	83 in.
Upright weight:	30 lbs.
Total weight:	76 lbs.
Capacity:	300 lbs.



The optional counterweight system locks into place for safe and steady lifting.

THE SMART CHOICE FOR MOVING 300-LB. LOADS TO A ROOFTOP WORKSITE.



Quickly lift lightweight mechanical equipment, tools, materials, and other objects to rooftop worksites with Garlock's Hand Power Hoist. The hoist sets up in just a couple minutes — no tools required. Plus, the boom can be set at three different angles to ensure full clearance with bulky equipment and parapet walls. The Hand Power Hoist easily supports loads of up to 300 pounds when used with Garlock's optional counterweight system. And it dismantles just as quickly as it assembles — no tools required.



Hoisting wheel and rope not included.

The boom adjusts to three different positions to accommodate larger equipment and parapet walls.

*Innovative Ideas
and Quality Products*

DISTRIBUTED BY



465 Lucas Ave, Winnipeg,
MB. R3C 2E6
Ph (204) 774-5079 Fax (204) 775-6142
email: info@frsmb.com

GARLOCK
EQUIPMENT COMPANY

2601 Niagara Lane
Plymouth, MN 55447
763 /553 /1935
800 /328 /9522