

#78 One Ply Graveler

For Efficient Application of Ballast Stone

You won't find a better way to spread ballast stone.

Garlock's #78 Graveler offers unmatched performance when it comes to spreading stone. Here's why:

- Larger payload capacity, up to 12 cu. ft.
- Superior handling with excellent balance and maneuverability, even with a full load.
- Spreads evenly at top speed — under control.

Get the most out of your graveling crew.

Our larger payloads mean less trips back and forth*. And our self-propelled design keeps the operator walking forward — not pushing and pulling. Reduced operator fatigue means increased productivity. Some roofers report up to 15 tons of stone spread in one hour using a #78 Graveler.

Maximize your System Efficiency.

Garlock's #78s can pay off in another way, too. They can keep your conveyor, hoist or boom truck operating closer to its maximum capacity. (More product info on back).




TM
GARLOCK
ROOFING EQUIPMENT

*Before operating, make certain deck is capable of supporting the loaded weight. Read instructions for optimum performance and safety.



- The #78 Graveler is another Garlock original.
- Gravel is discharged just behind the drive wheels to protect insulation and membrane of roof.
- Wheels are inset so that you can spread gravel right up next to previous row without running over stone.
- 36" wide gate is adjustable to handle every size from 2" stone to pea gravel.
- 12 cu. ft. capacity with extension hopper; 9 cu. ft. capacity less extension.

- Conveyors and #78 Gravelers are made for each other. No other system is more efficient.
- #78 transports at over 4 mph.
- Rear tire cushions the load on uneven surfaces.
- "Neutral Lock" allows positioning and handling of machine without power.

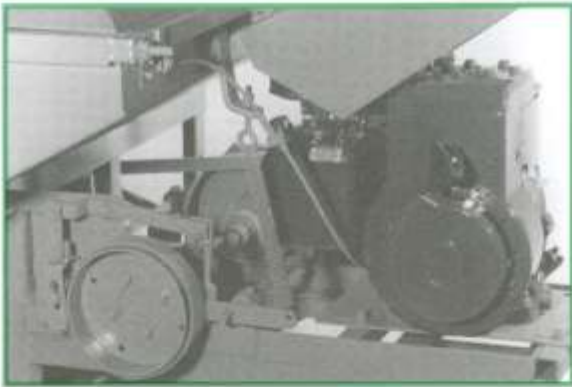

Standard features include:

- Deadman brake control
- Throttle control built into frame for dependability and ease of operation
- Engine Cover — protects from stone and rain
- 5.5 hp Honda engine standard
- 2-year warranty on engine
- Garlock one year warranty on machine

Specifications

Length	76"	Wheels:	
Width	40½"	Front	4.00 x 8, 4-ply
Height	39⅝"	Drive Tires	18-8.50 x 8, 4-ply
Weight	400 lbs.	Bumper Tire .	4.10/3.50 x 4 pneumatic

Ask your Garlock dealer
for a demonstration.



2601 Niagara Lane
Minneapolis, Minnesota 55447
(612) 553-1935

Distributed by:



FRS
CANADA
A Division of THE FRS GROUP INC.

465 Lucas Ave, Winnipeg,
MB. R3C 2E6
Ph (204) 774-5079 Fax (204) 775-6142
email: info@frsmb.com