

SPECIFICATIONS

Model 68 Hook

Throat Opening.....68"
 Fork Width.....24"
 Capacity.....2000 lbs.
 Empty Weight.....190 lbs.
 Dims.....42Lx24Wx76Ht.

1100 lb. Gravel Bucket

Gross Load.....1240 lbs.
 Capacity.....10 cu.ft
 Empty Weight.....142 lbs.
 Dims.....30Lx30Wx34Ht.

800 lb. Trash Tray

Capacity.....14 cu.ft.
800 lbs.
 Empty Weight.....100 lbs.
 Dims.....50Lx40Wx14Ht.

Hoisting Accessories

#68 Hoist Hook

Our heavy-duty No. 68 Hoist Hook easily picks up both insulation and rolls of felts or single-plys. A revolving stop on each leg of the hook keeps roll goods from rolling. When the stops are not needed, simply fold away.



Hoist Hook

1100 lb. Gravel Bucket

Our 1100 lb. gravel bucket can be loaded right from the truck or front-end loader. The design allows it to easily fill rooftop equipment like wheelbarrows, workhorses and gravel spreaders with gravel. You can even use the bucket with cranes to load rooftop gravel hoppers.



Gravel Bucket

800 lb. Trash Tray

The Trash tray lowers tearoff debris or carries up supplies to the roof. When the tray reaches the ground for tearoff, simply unhook one of the cables and raise the tray a few feet to self-dump the load into the dumpster. The three-point lifting sling keeps load level throughout the hoisting operation.



Trash Tray



Where Better Engineering Comes Out On Top




465 Lucas Ave, Winnipeg, MB. R3C 2E6
 Ph (204) 774-5079 Fax (204) 775-6142
 email: info@frsmb.com

ATLAS MegaLift HOIST

Power Unit.....431 lbs.
 Cable Drum.....180 lbs.
 Main Boom.....157 lbs.
 A-Frame Tower...175 lbs.
 Swing Arm.....105 lbs.
 Antenna Brace....41 lbs.
 Bottom Brace.....20 lbs.
 CounterBalance..1280 lbs.

Main Boom.....27" x 192"
 Disassembled 22" x 95"
 Upper Section 22" x 97"
 A-Frame.....89"H x 144"W
 Disassembled 89"H x 36"W
 Right Half 48"H x 84"W
 Swing Arm.....10" x 120"
 Antenna Brace....14" x 60".

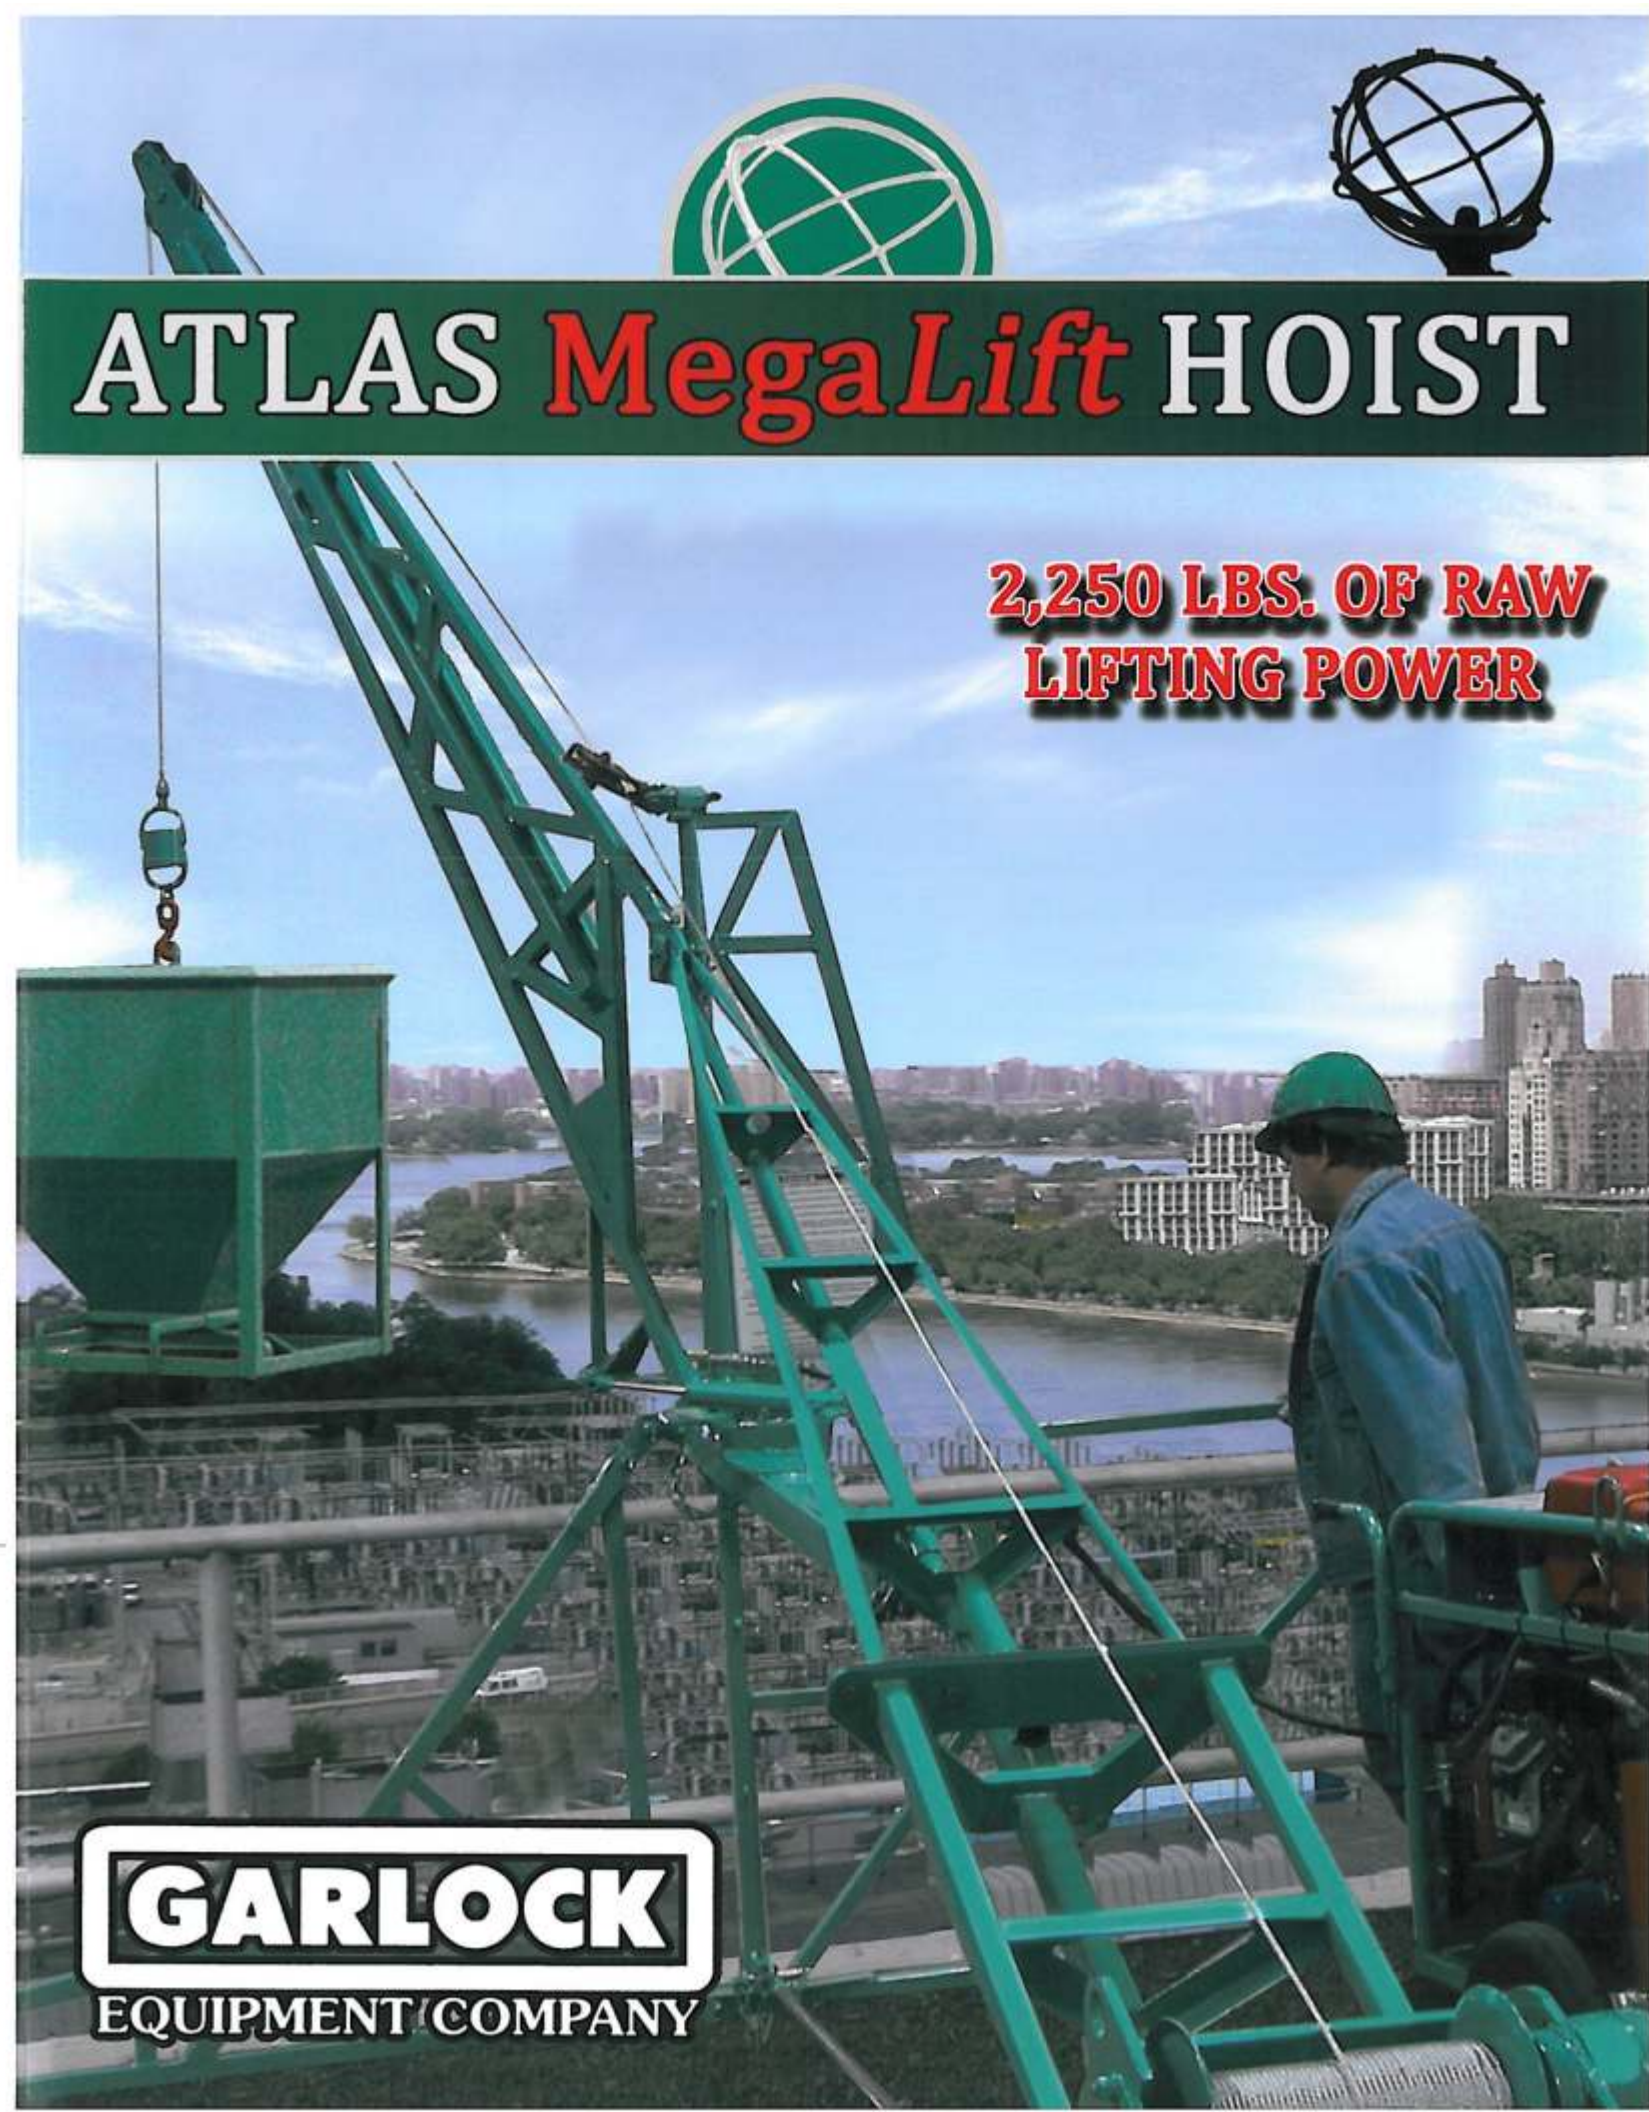

ATLAS MegaLift HOIST

2,250 LBS. OF RAW LIFTING POWER



ATLAS MegaLift HOIST

The All New Atlas MegaLift Hydraulic Hoist from Garlock Equipment sets a higher standard of power, speed and smooth lifting performance to get your loads up and down in record time!

Rated at a full metric ton of 2250 lbs. the Atlas MegaLift Hoist is an undisputed powerhouse in the roofing industry.

Loaded with features, fingertip control and smooth operating performance, you'll soon agree that this is simply the best material hoist on the market.



For years, Garlock Hydraulic Hoists are the brand trusted by thousands of roofers nationwide.

Power Swing In and Out with Precision Control.



Set up hoist a safe distance from edge of roof then wheel into position, remove wheels and begin hoisting operations.

One Lever Control for Single Hand Operation.

Swing Arm Can Be Setup To Swing In To the Right or Left.



"Receiver Hitch" type assembly. No aligning bolt holes for easier, quicker assembly.

Additional Clearance on Side Leg Support to Handle Large Bulky Loads.



A-Frame and Boom can be disassembled to fit into elevators.

Only 9 Major Components Make Setup Fast and Simple.



Slip-on hand jack makes installing the transport wheels simple.

Counter Weight System Standard Equipment - Simply Fill With Concrete.

- ### FEATURES
- 2,250 LB. Lift Capacity - Single Line w/225' Cable
 - 160 fpm Line Speed
 - 225' Cable Standard Up to 425' Opt.
 - Pin Quick Connects for All Connecting Points
 - 50" Boom Reach
 - 135" High Throat Opening
 - Separate Power Pack on Wheels 33" wide X 39" long



- 18 HP Honda Electric Start with Self-Contained Hydraulics

GARLOCK

EQUIPMENT COMPANY

www.garlockequip.com

2,250 LBS. OF RAW LIFTING POWER